


3309 (Focus View) Specifications and Dimensions

Specifications


Relative Humidity


100% condensing, non-submersible when connectors are protected

Imperial/US

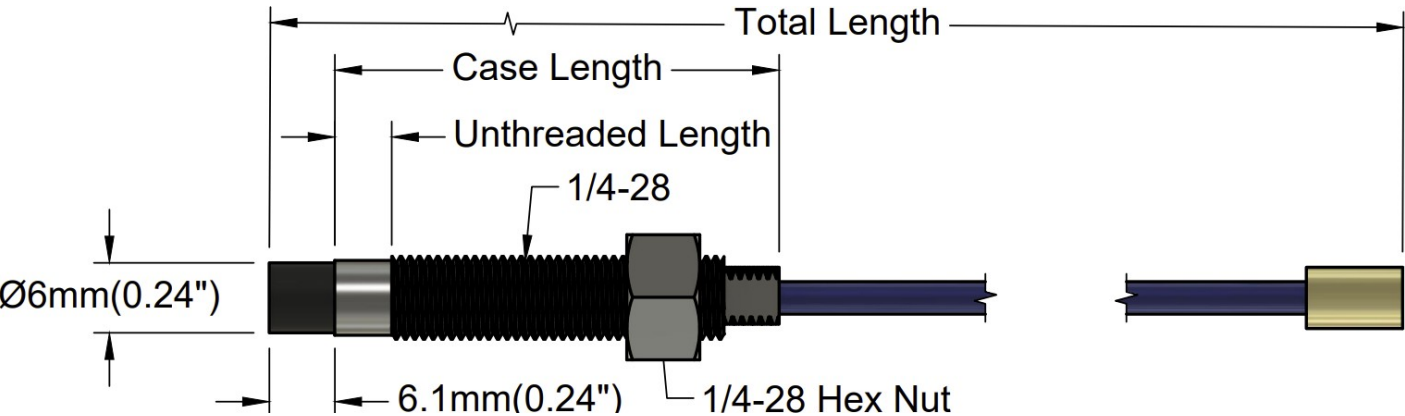


MS3309	XX	—	AXX	—	BXX	—	CXX	—	DXX	—	EXX
MS330901	1/4-28 UNF thread, No armor										
MS330902	1/4-28UNF thread, With armor										
			Unthreaded Length		Overall Case Length		Total Length		Connector & Cable-Type		Agency Approval
			Order in increments Of 0.1"		Order in increments Of 0.1"						
			Example: 05=0.5"		Example: 35=3.5"		05 0.5 meter/20"		01 Miniature coaxial connector, connector protector & standard cable		00 Not required
			Minimum unthreaded Length: 0.0 in		Minimum unthreaded Length: 0.8"		10 1.0 meter/39"		02 Miniature coaxial connector & standard cable		05 Multiple Approvals
			Maximum unthreaded 9.9"		Maximum unthreaded: 9.9"		50 5 meter/16.4'		11 Miniature coaxial Connector,connector Protector & fluid block cable		
							70 7.0 meter/23.0'		12 Miniature coaxial Connector&fluid Block cable		

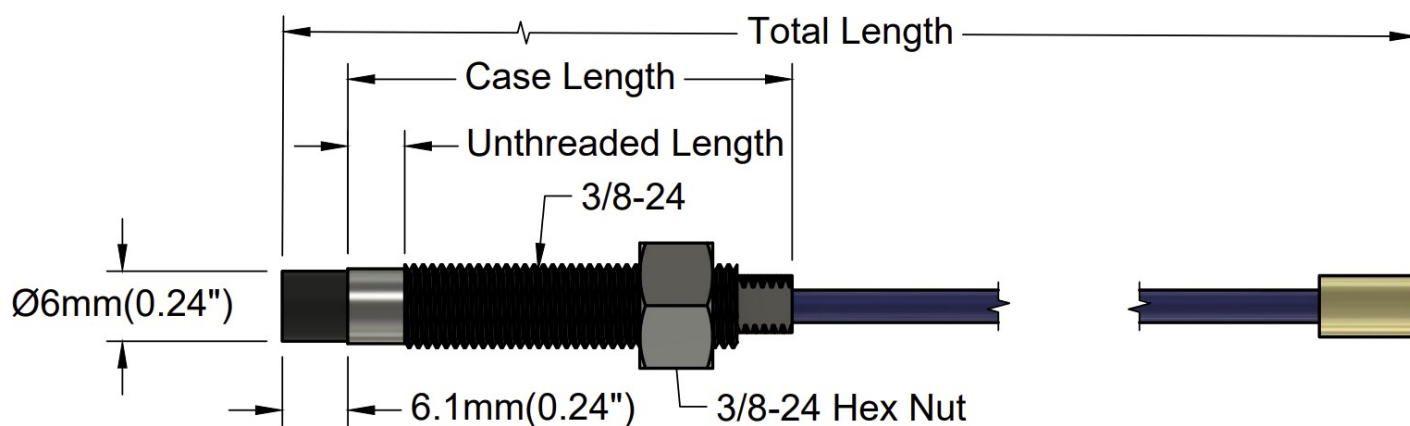


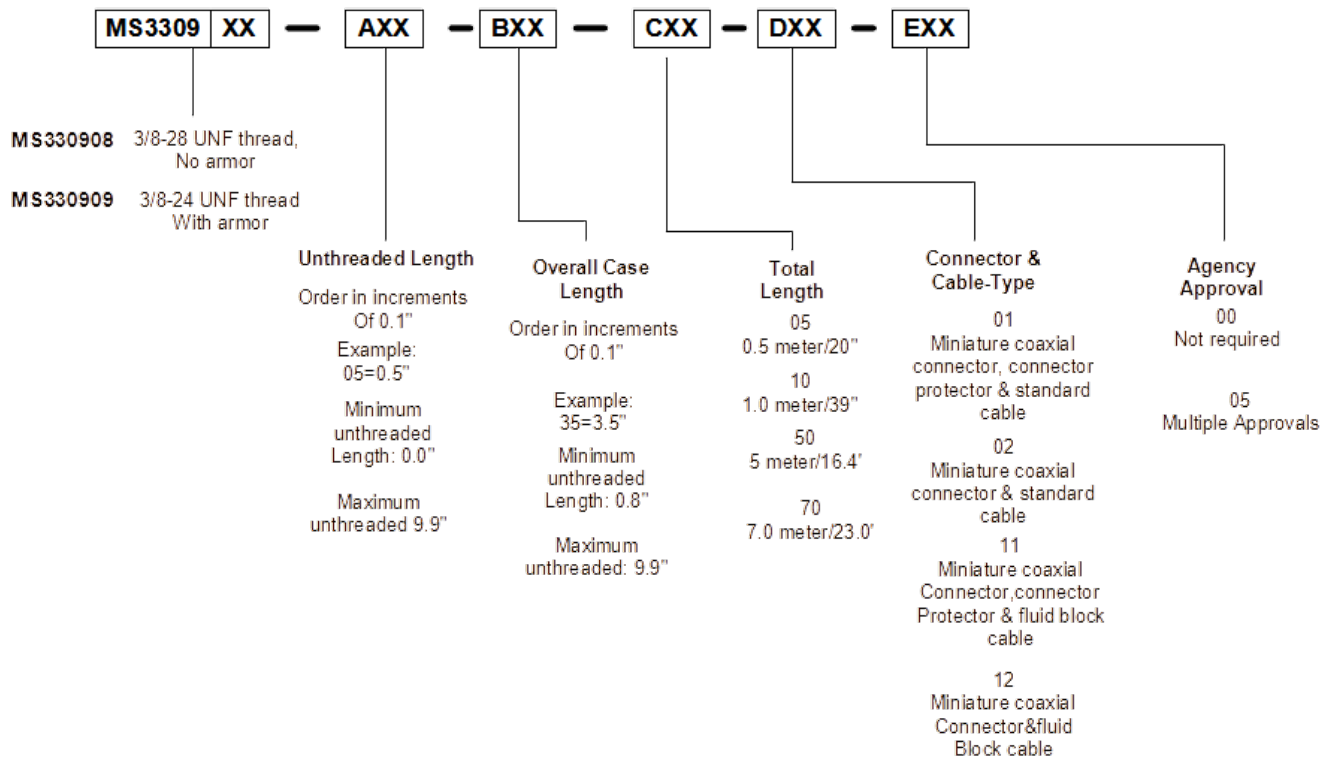

Metric

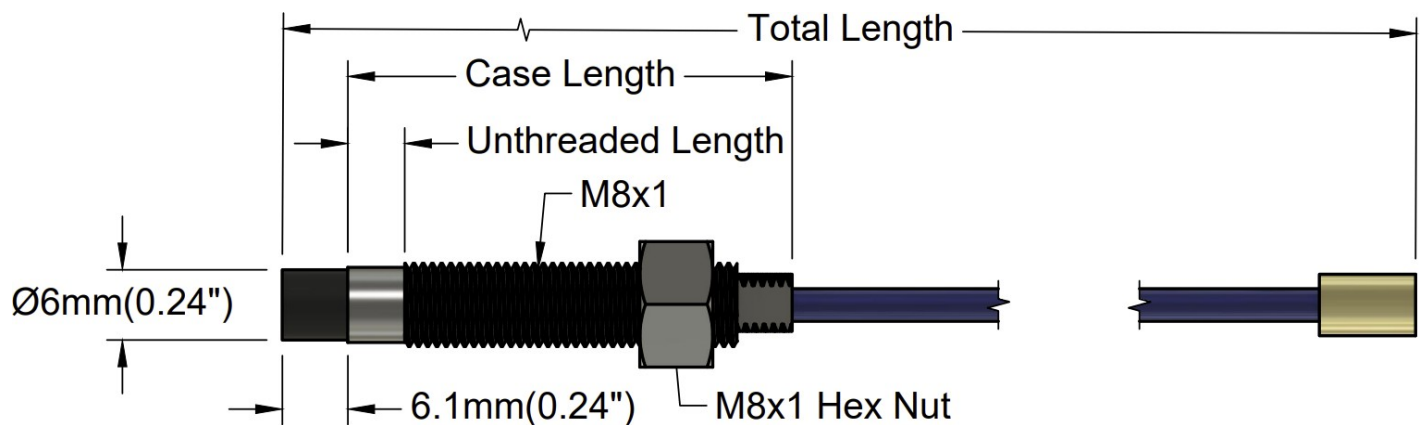



MS3309	XX	—	AXX	—	BXX	—	CXX	—	DXX	—	EXX
MS330903	M8 x 1 thread, no armor										
MS330904	M8 x 1 thread, with armor										
			Unthreaded Length		Overall Case Length		Total Length		Connector & Cable-Type		Agency Approval
			Order in increments Of 10 mm		Order in increments Of 10 mm		05 0.5 meter/20"		01 Miniature coaxial connector, connector protector & standard cable		00 Not required
			Example: 06=60 mm		Example: 06=60 mm		10 1.0 meter/39"		02 Miniature coaxial connector & standard cable		05 Multiple Approvals
			Minimum unthreaded Length: 0 mm		Minimum unthreaded Length: 20 mm		50 5 meter/16.4'		11 Miniature coaxial Connector, connector Protector & fluid block cable		
			Maximum unthreaded length: 230 mm		Maximum unthreaded length: 250 mm		70 7.0 meter/23.0'		12 Miniature coaxial Connector&fluid Block cable		

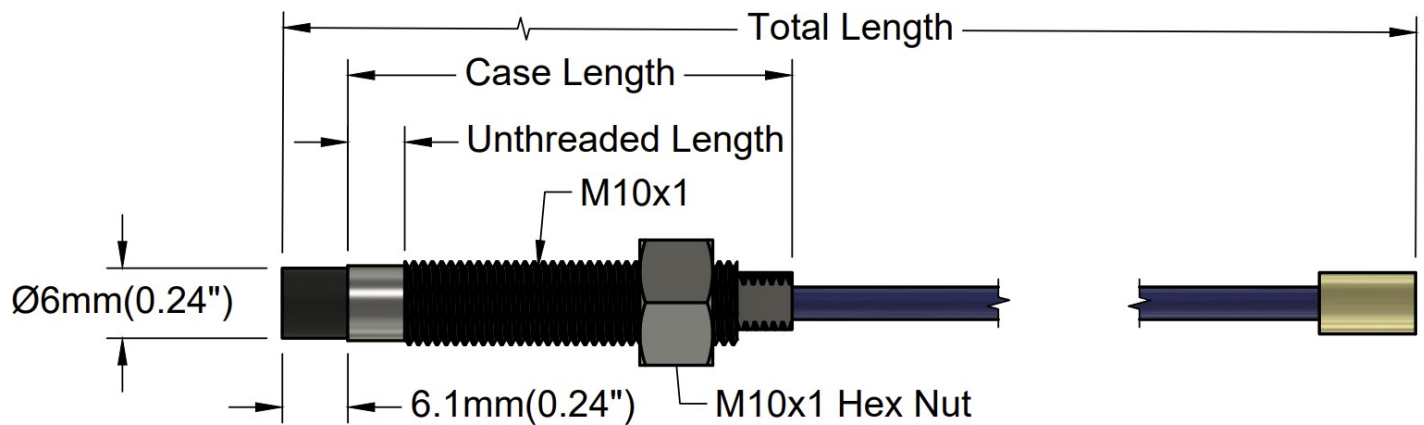


	MS3309	XX	XX	XX	XX	XX	XX
MS330905	M10 x 1 thread, No armor						
MS330910	M10 x 1 thread, With armor						
	Unthreaded Length		Overall Case Length		Total Length	Connector & Cable-Type	Agency Approval
	Order in increments Of 10 mm		Order in increments Of 10 mm		05	01	00
	Example: 06=60 mm		Example: 06=60 mm		0.5 meter/20"	Miniature coaxial connector, connector protector & standard cable	Not required
	Minimum unthreaded Length: 0 mm		Minimum unthreaded Length: 20 mm		10	02	05
	Maximum unthreaded 9.9"		Maximum unthreaded: 9.9"		50	Miniature coaxial connector & standard cable	Multiple Approvals
					70	11	
					7.0 meter/23.0'	Miniature coaxial Connector,connector Protector & fluid block cable	
						12	
						Miniature coaxial Connector&fluid Block cable	

Reverse Mount - Metric or Imperial

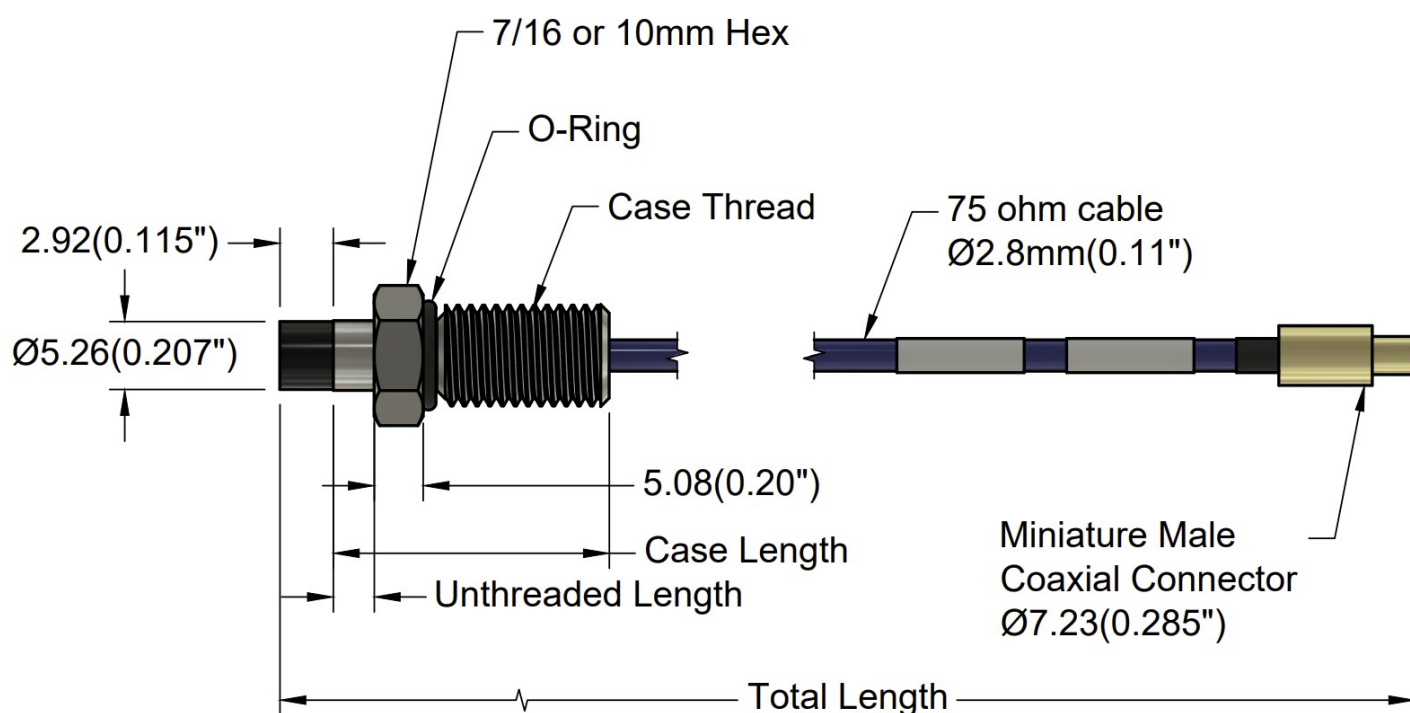

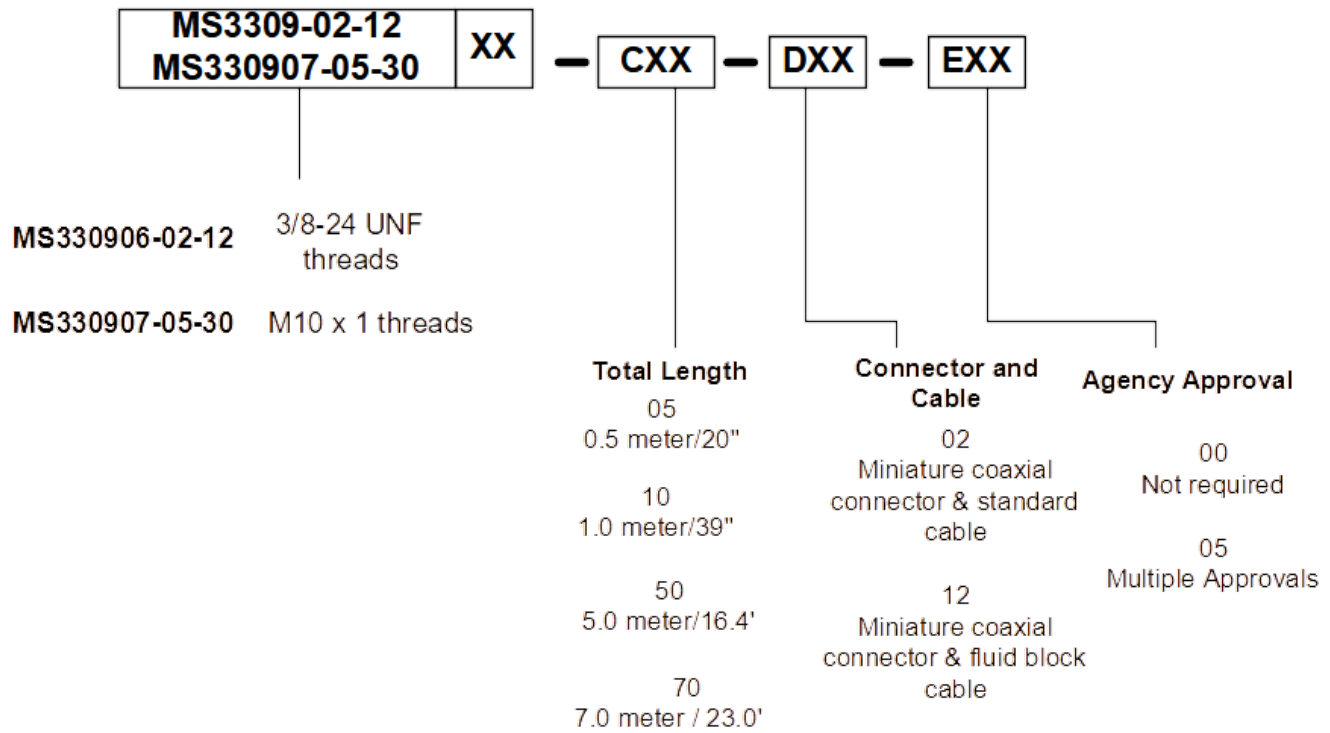

Extension Cables

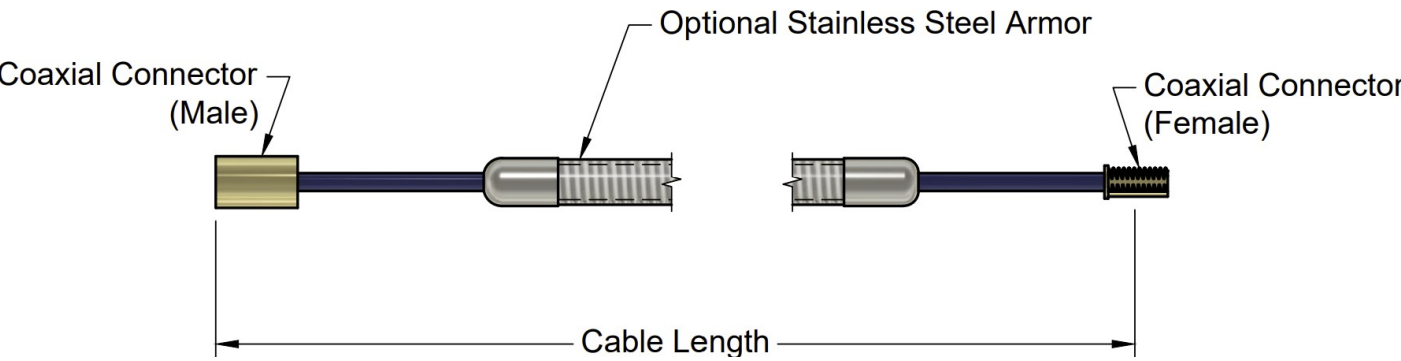

MS330930 **XX** — **AXXX** — **BXX** — **CXX**

MS330930

Cable Length

**Connector and
Cable**

Agency Approval

040
4.0 meter/13.1'

00
No stainless steel armor

00
Not required

045
4.5 meter/14.8'

01
Stainless steel armor &
FEP jacket

05
Multiple Approvals

060
6.0 meter/19.7'

02
Stainless steel armor, no
FEP jacket

065
6.5 meter/21.3'

Revision #3

Created 16 August 2022 17:09:46 by Bach_L

Updated 9 May 2023 17:25:50 by Bach_L