

TwinProx Universal Proximity System (Software Manual)

TwinProx User Interface Version
1.0.5

TwinProx User Interface Release 5

Connecting to TwinProx

TwinProx

GET STARTED

Select available device

COM	4	▼	SCAN	ENABLED	DISABLED
RTU	5	▼	SCAN	ENABLED	DISABLED
CONNECT					

Configuring TwinProx

Information - shows the hardware and software revisions.

ONLINE

RESCANMODBUS STATISTICS

System Configuration

Linearization

Time Waveform Display

System Configuration

Information

Probe/Target

Applications

Alarms

Time Waveform

Linearization

Update

Firmware and UI Information	
TwinProx Firmware Version	1.10
TwinProx Firmware Release	12
TwinProx User Interface Version	1.0.5
TwinProx User Interface Release	5

Probe/Target - Allows user to define the probe series, length and target materials.

ONLINE

RESCANMODBUS STATISTICS

System Configuration

Linearization

Time Waveform Display

System Configuration

Information

Probe/Target

Applications

Alarms

Time Waveform

Linearization

Update

Channel A Probe and Target Settings		Channel B Probe and Target Settings	
Probe Series and System Length	3309FV 1m	Probe Series and System Length	3309FV 1m
Target Material	4140	Target Material	4140

Save Settings

Applications - Allows user to define the application and relevant settings for that particular application for each

channel/probe.

ONLINE

RESCANMODBUS STATISTICS

System Configuration

Linearization

Time Waveform Display

System Configuration

Information

Probe/Target

Applications

Alarms

Time Waveform

Linearization

Update

Machine Speed Settings

Machine Speed Range:6000

Application Settings

Channel A Application:Radial Vibration

Channel B Application:Phase Reference

Channel A Gap Adjust:Default

Channel B Gap Adjust:Default

Threshold Settings

High Threshold:75.0

Low Threshold:55.0

Digital to Analog Converter(DAC) Settings

Channel A DAC:Disabled

Channel B DAC:Disabled

Save Settings

Alarms - Allows user to define the alarms relevant to the selected application.

ONLINE

RESCANMODBUS STATISTICS

System Configuration

Linearization

Time Waveform Display

System Configuration

Information

Probe/Target

Applications

Alarms

Time Waveform

Linearization

Update

Channel A Alarms

Channel B Alarms

Distance High High: 00.0

Distance High: 00.0

Distance Low: 00.0

Distance Low Low: 00.0

Vibration High: 00.0

Vibration High High: 00.0

Speed Low: 00.0

Speed High: 00.0

Distance High High: 00.0

Distance High: 00.0

Distance Low: 00.0

Distance Low Low: 00.0

Vibration High: 00.0

Vibration High High: 00.0

Speed Low: 00.0

Speed High: 00.0

Save Settings

Time Waveform - Allows user to add filtering, total runout

compensation and a vibration threshold which effect the output on the Time Waveform Display Tab.

ONLINE

RESCANMODBUS STATISTICS

System Configuration

Linearization

Time Waveform Display

System Configuration

Information

Probe/Target

Applications

Alarms

Time Waveform

Linearization

Update

Chart Settings

Average filtering :

ONOFF

Total Runout (TRO) :

ONOFF

Vibration Threshold :

0.0

Save Settings

Linearization - Returns any changes made to the linearization of a channel to original factory settings.

ONLINE

RESCANMODBUS STATISTICS

System Configuration

Linearization

Time Waveform Display

System Configuration

Information

Probe/Target

Applications

Alarms

Time Waveform

Linearization

Update

Linearization Configuration

Return to factory settings

Update - Allows for a user to upload new firmware to the connected TwinProx hardware.

ONLINE

RESCANMODBUS STATISTICS

System Configuration

Linearization

Time Waveform Display

System Configuration

Information

Probe/Target

Applications

Alarms

Time Waveform

Linearization

Update



Drag and Drop Upload file


Drag or choose your file here

Choose File

Linearizing (Verification) of TwinProx

Channel A Example:

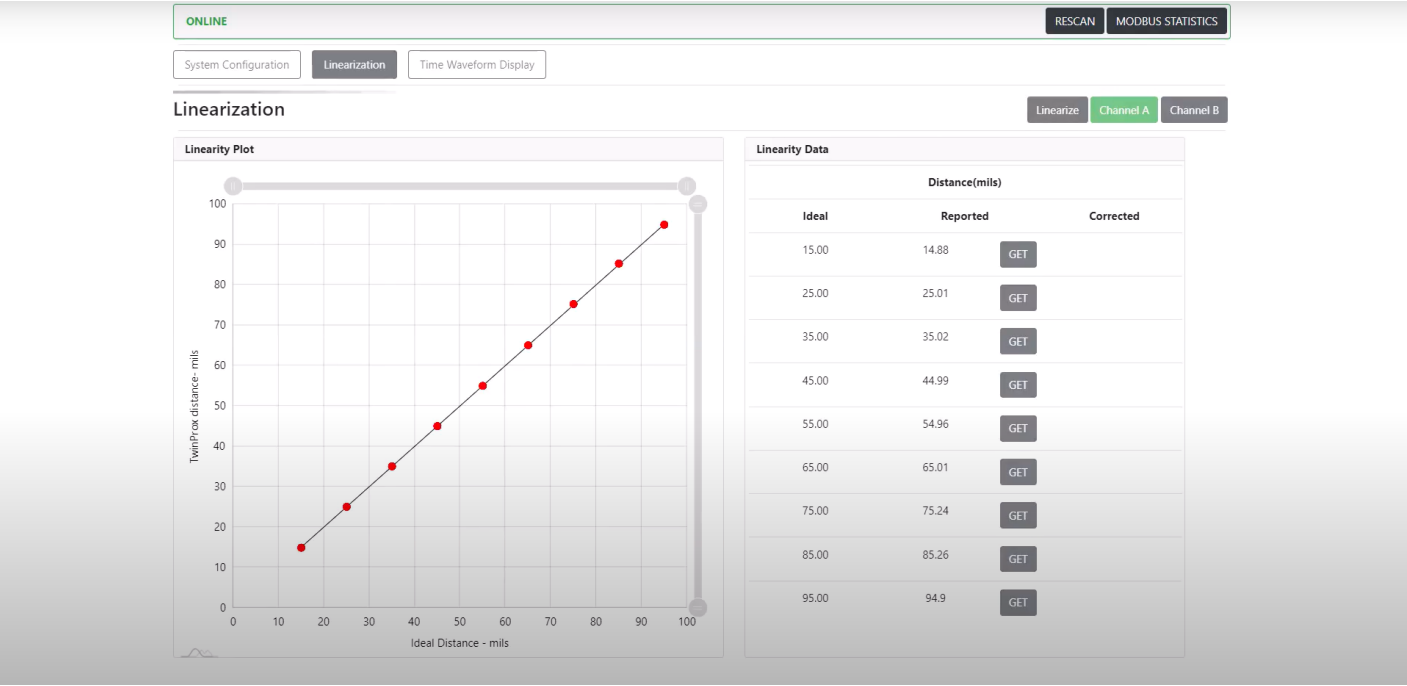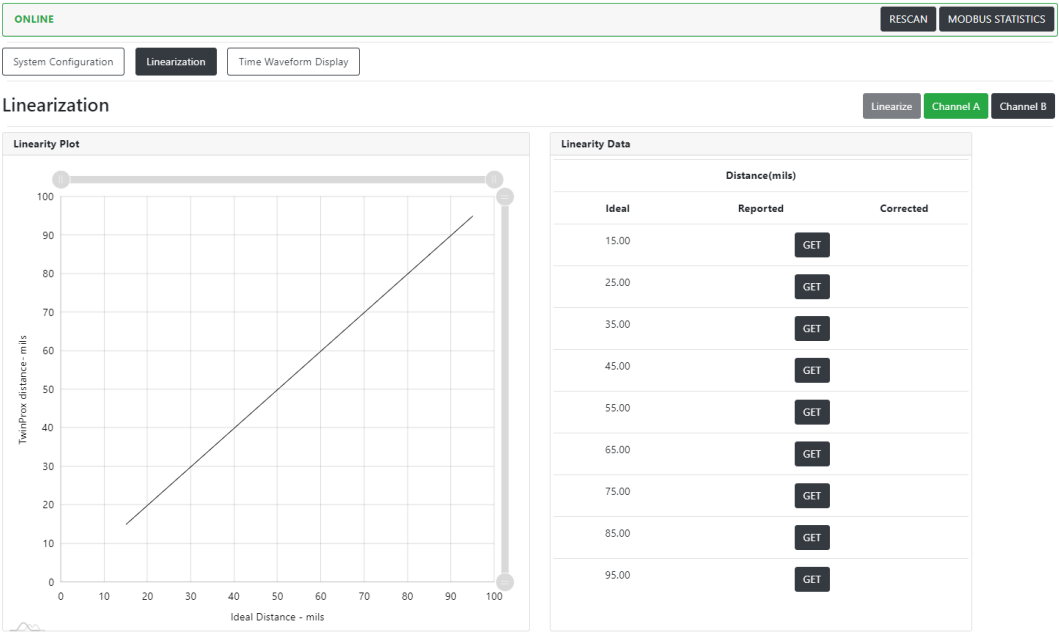

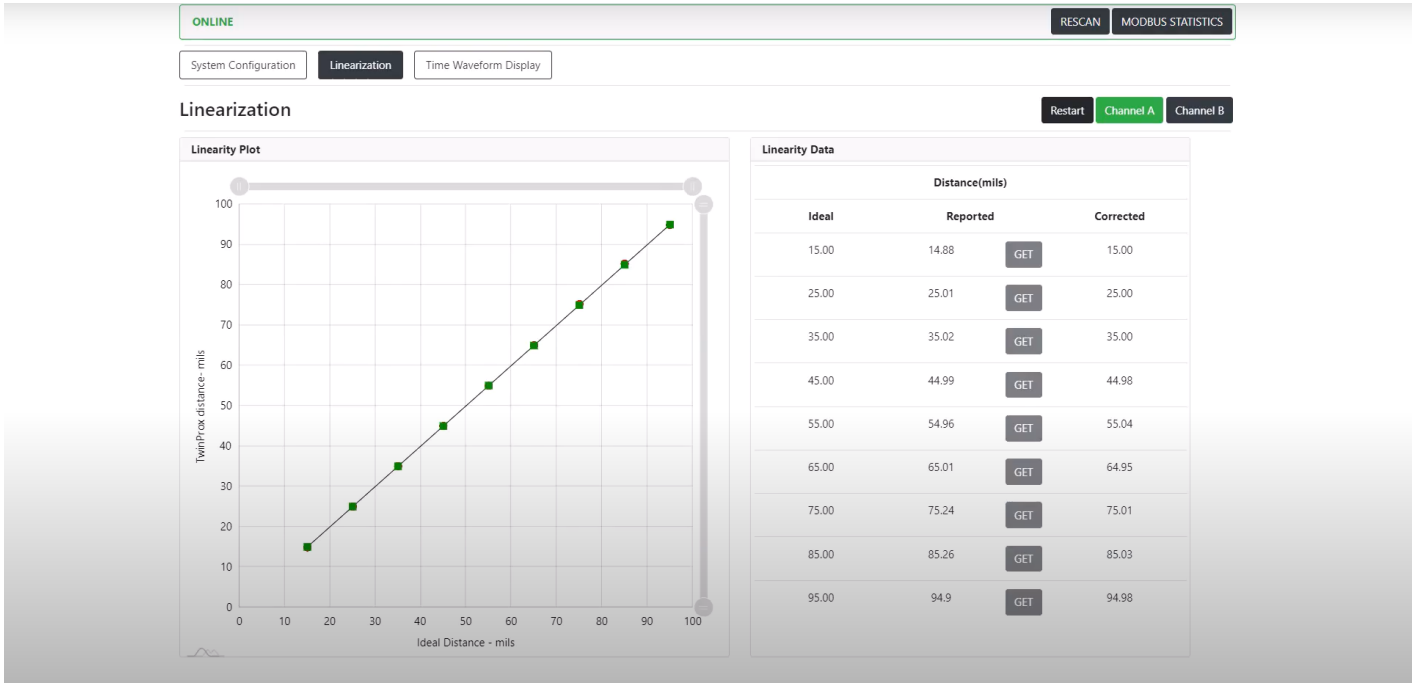


Video Example:

Waveform and Orbit from TwinProx


Starting the Live Waveform and Orbit

Select the channels that you would like to see data from, click the play button.

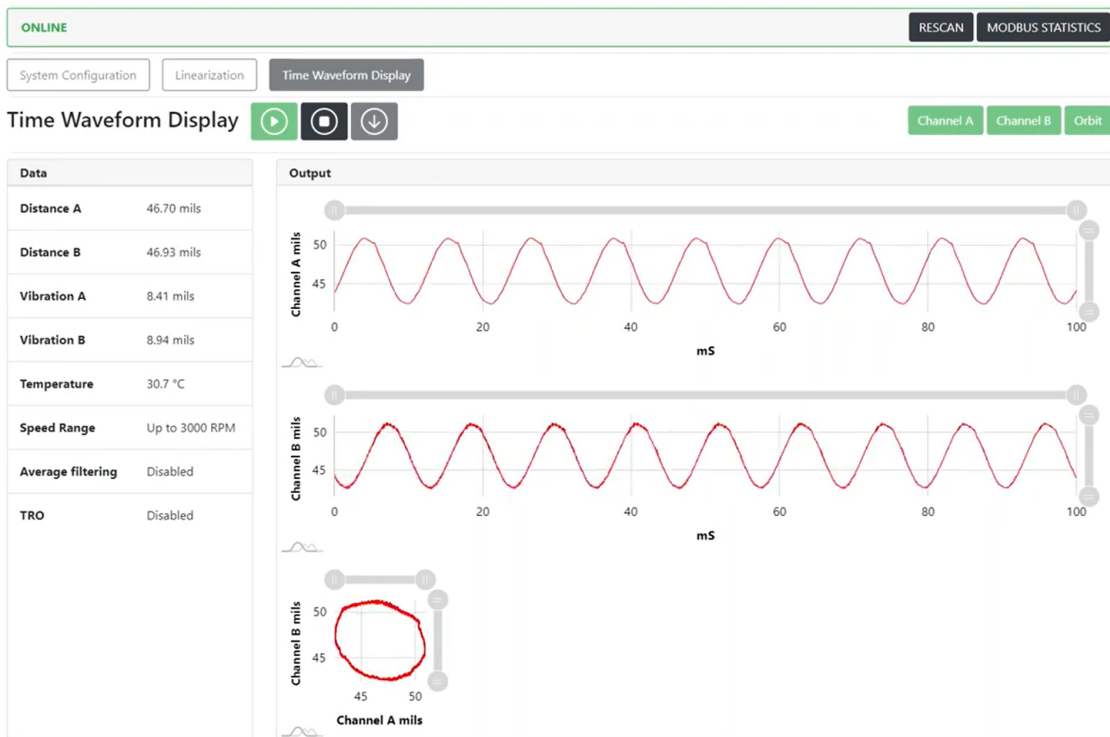

Stopping the Live Waveform and Orbit

Click the stop button.

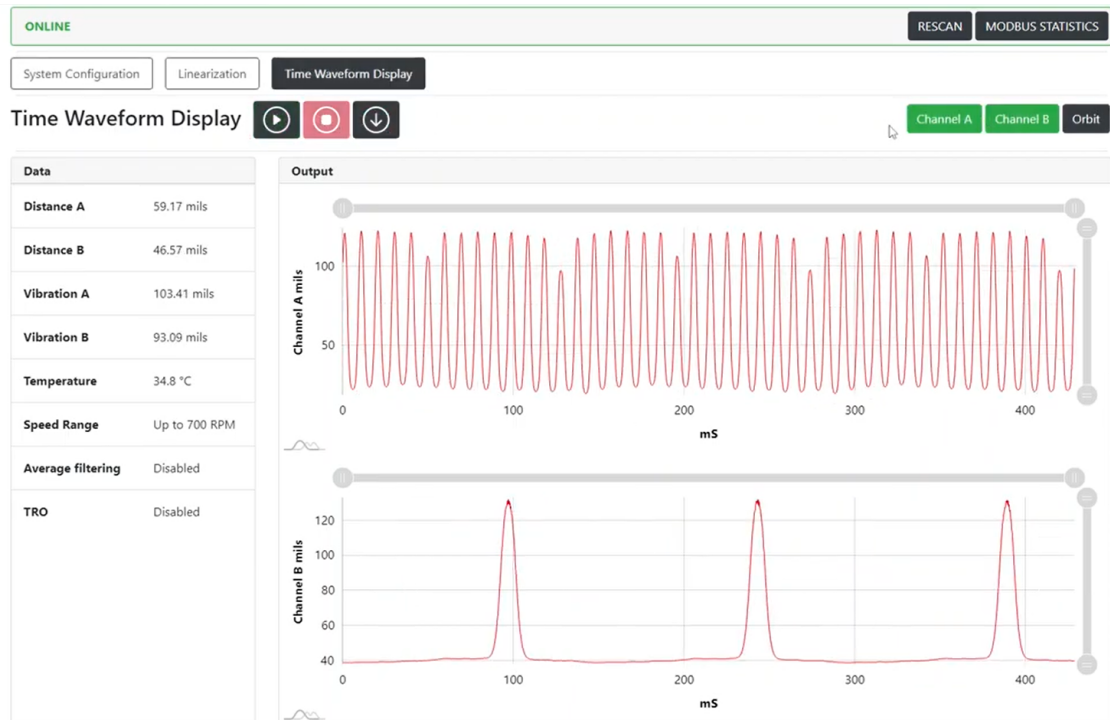

Downloading the Last Frame of Waveform and Orbit

After clicking the stop button, you can click the download button to save a CSV of the last waveform and orbit data captured.

The CSV also contains a timestamp and configuration parameters of the TwinProx and Channel settings.

All trademarks, service marks, and/or registered trademarks used in this document belong to Machine Saver, Inc.

© 2023, Machine Saver, Inc. All rights reserved.

Revision #3

Created 22 May 2023 21:18:39 by Bach_L

Updated 22 May 2023 21:58:24 by Bach_L